

| Freeman Roofing Five Rib | |
|--------------------------|--------------------|
| 0.4mm | Colorsteel® Maxam® |
| 0.55mm | Colorsteel® Maxam® |
| 0.4mm | Zincalume® |
| 0.55mm | Zincalume® |


BMT ridge-flashings to match Five Rib material

5-RIB stop end

treated timber batten

timber rafter

Vapour barrier/ Roofing Underlay to underside of tray cladding

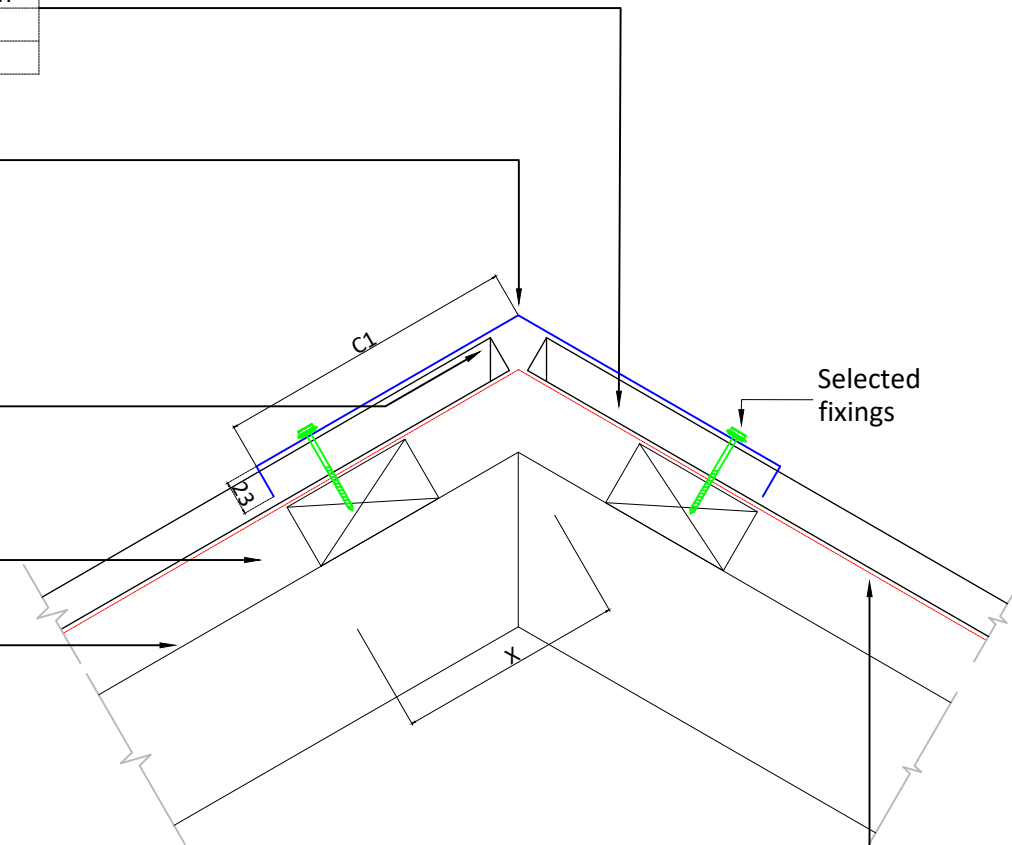

Notes:
Category A:

Low, Medium or High Wind Zones, all pitches
Very High and Extra High Wind Zones where the pitch is equal to or greater than 10°.

Category B:

Very High where the pitch is less than 8°, and
Extra High Wind Zones all pitches.

Category C:

SED Wind Zones up to 60 m/s all pitches.

Category D:

SED up to 68 m/s, all pitches.

| Category | | | | |
|-------------------|--------|--------|--------|----------------|
| Dimension | A | B | C | D |
| C1 | 130 mm | 200 mm | 200 mm | 200mm + baffle |
| Ridge Type | STD | Wide | Wide | Wide |
| Purlin Position X | | | | |
| Pitch 8°-15° | 165 mm | 150 mm | 150 mm | 150 mm |
| Pitch 15°-30° | 150 mm | 200 mm | 200 mm | 200 mm |
| Pitch 30°-45° | 130 mm | 180 mm | 180 mm | 180 mm |